

ANT ESPORTS  
GP300 PRO V2  
WIRELESS GAMEPAD

Warranty

Ant Esports GP300 PRO V2 Wireless Gamepad comes with 1 year International warranty.

Warranty Card

Customer Name : \_\_\_\_\_

Product Name : \_\_\_\_\_ Model No.: \_\_\_\_\_

Address: \_\_\_\_\_ Date of Purchase: \_\_\_\_\_

Dealer Name : \_\_\_\_\_ Phone No.: \_\_\_\_\_

CONNECT WITH US ON

ANT ESPORTS

www.antesports.com  
support@antesports.com


\*Notice: Any alteration of the clauses and contents and copies are invalid.

\*All product names, logos, and brands are property of their respective owners.  
All company, product and service names used here are for identification purposes only.  
Use of these names, logos, and brands does not imply endorsement.

ANT ESPORTS  
GP300 PRO V2  
WIRELESS GAMEPAD



PRODUCT OVERVIEW

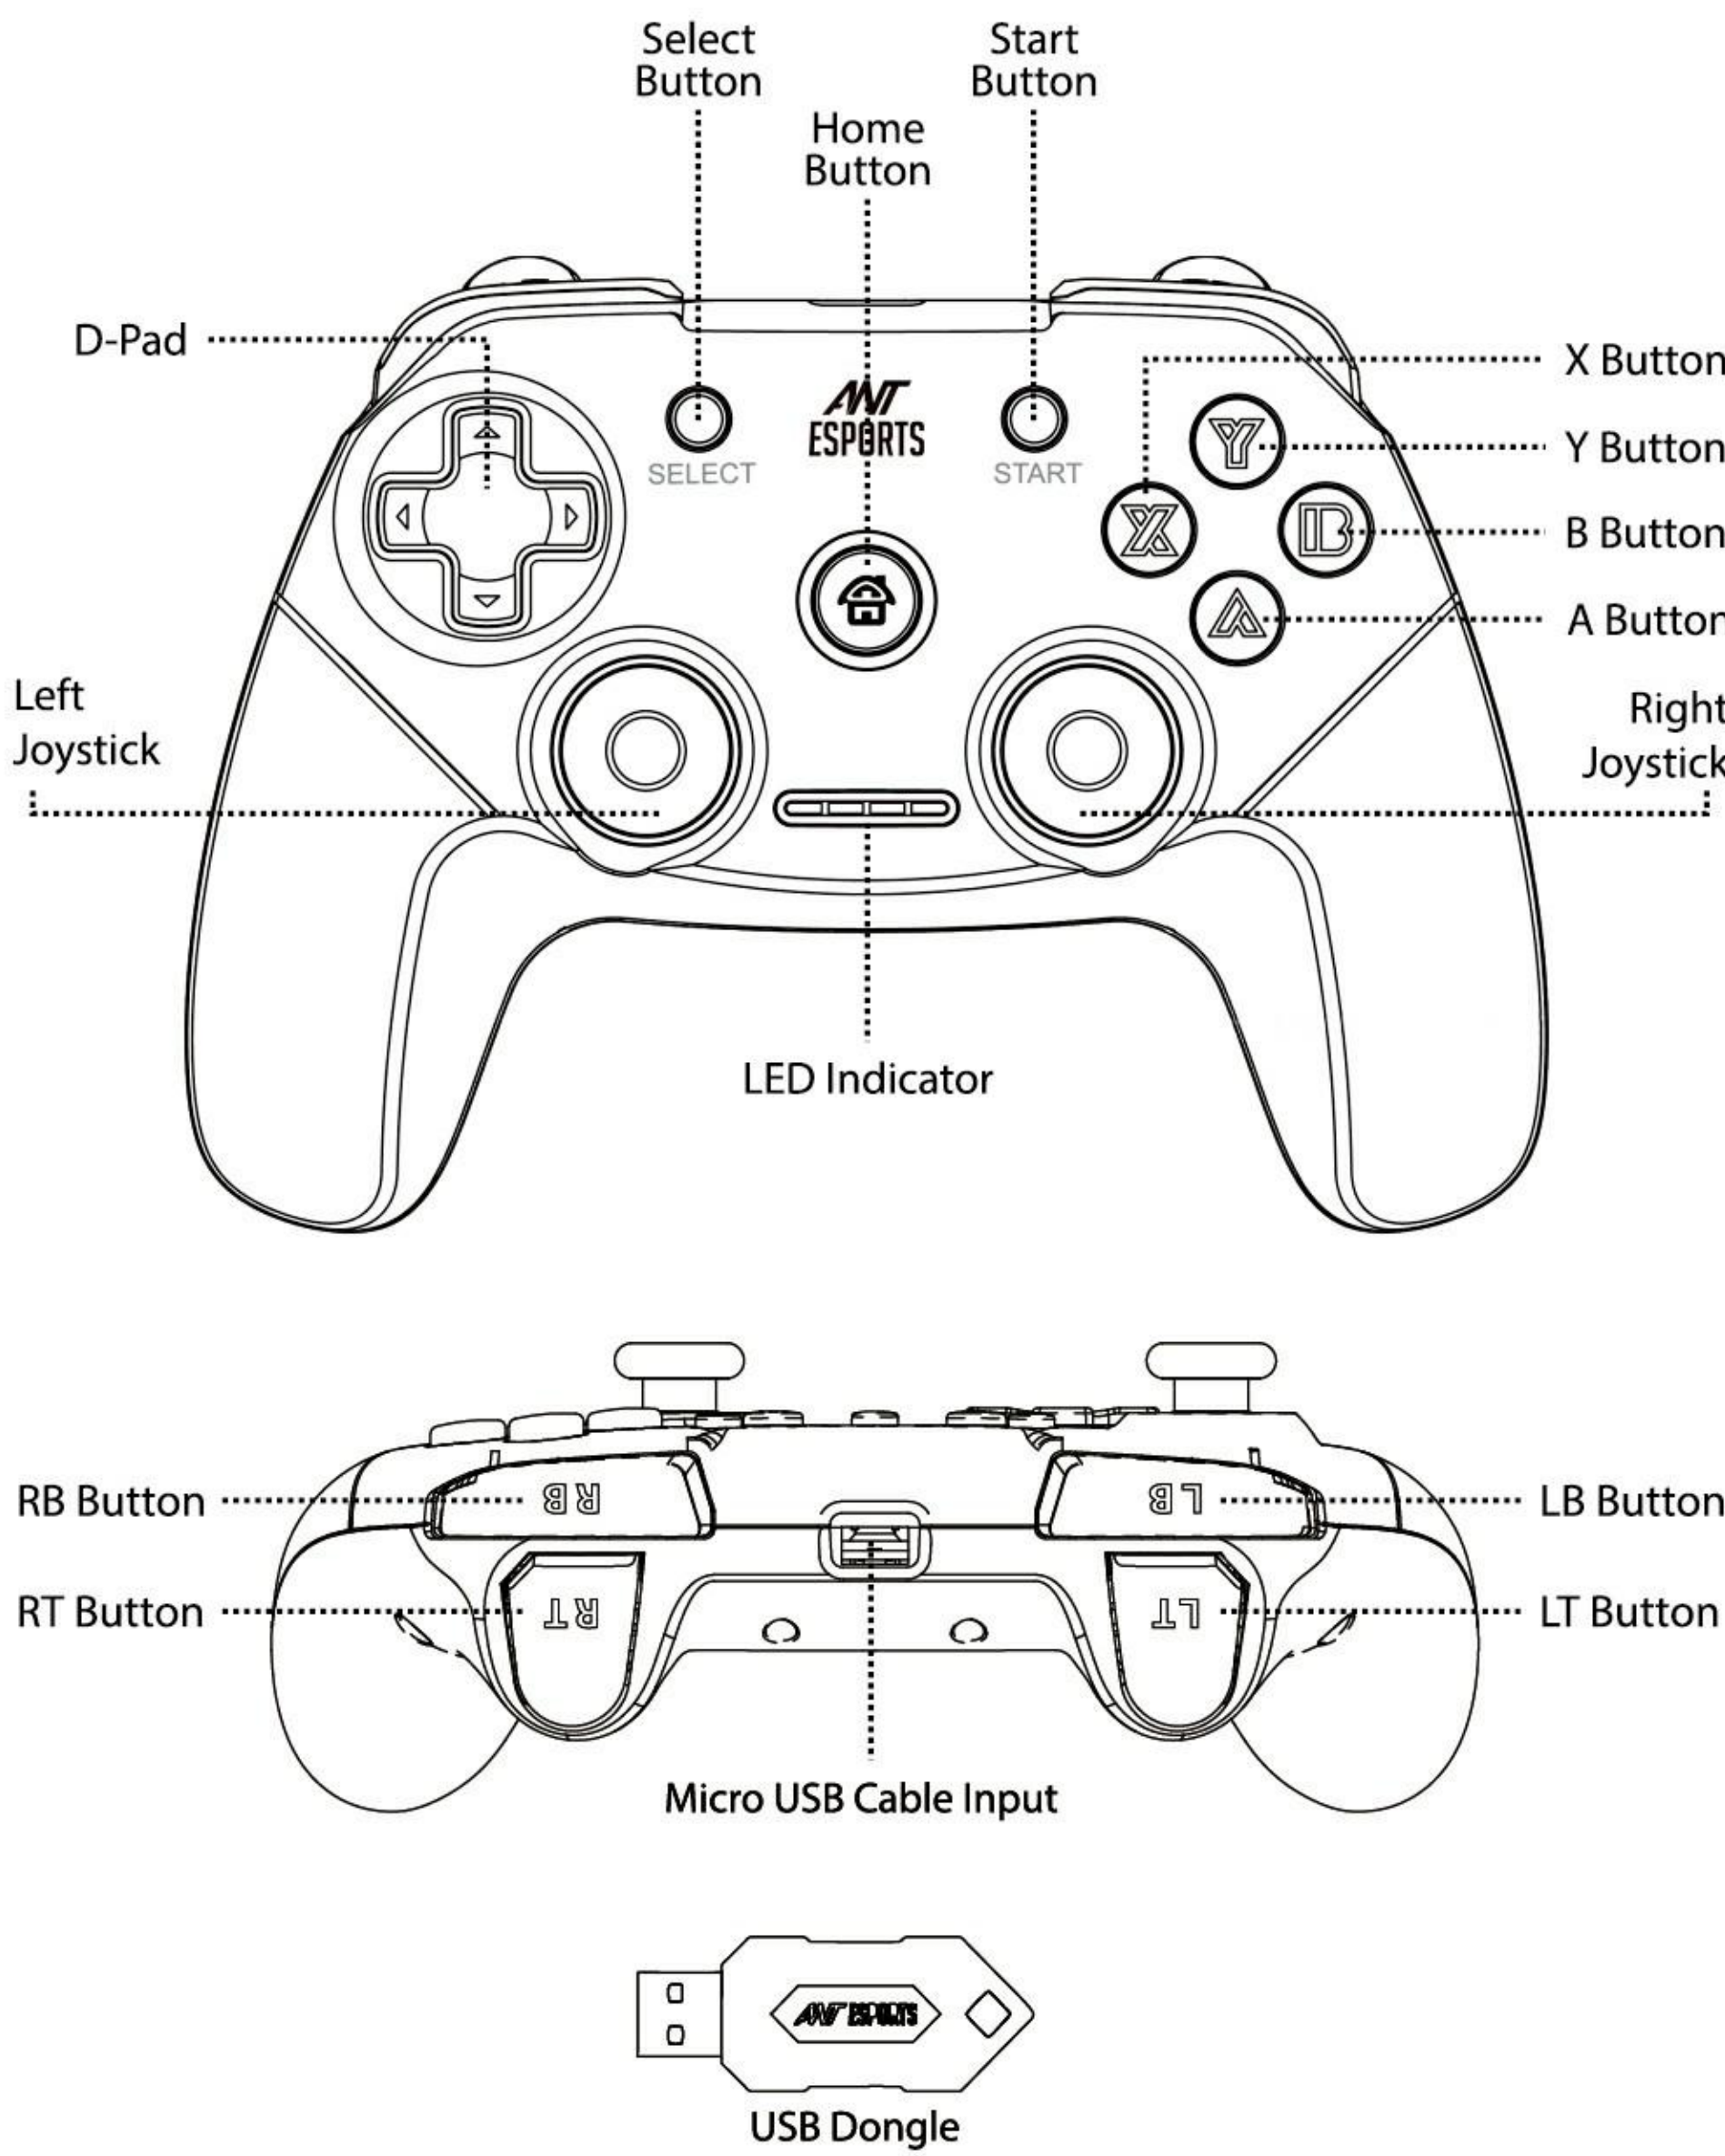

Download Support Driver:  
<http://antesports.com/downloads>

1

PRODUCT SPECIFICATIONS

- Integrated Dual Mode: X-input and Direct-input for greater games compatibility
- Wireless 2.4GHz technology with a range of up to 8 meters
- Lithium Polymer 600mAh battery for playing up to 12 hours in a row
- Charging time 2 to 3 hours
- Eccentric 360° analog sticks for more comfort
- Ultra-precise eight-way D Cross
- Double triggers and analog bumpers
- 12 numeric buttons, including [Home], [Start], [Select]...
- Action Button, [A], [B], [X] [Y]
- Dual vibration motors for maximum Games thrill
- Compatibility: PlayStation 3, Android and Windows XP above
- LED indicators (connection charge, discharge...)
- Comfortable rubber body
- With Private Design USB receiver
- OTG Connector for Android Phone/Tablet (support OTG function)
- Length of charging cable: 1m ± 5cm
- Dimensions: 158mm\*103mm\*69mm
- Weight: 190g ± 10g

COMPATIBILITY

The Controller Is Compatible With Games Running With Xinput Or Dinput Mode.  
The Controller May Not Vibrate With Some Games, As The Game May Not Support Vibration, Android Games will not support Vibration.

POWER, BATTERY, STANDBY

**Power On / off:**  
Press Home Button To Start The Controller;  
Press LE+R3 / Select And Start 4 Buttons To Power Off

CHARGING THE BATTERY:

When The Controller Is Running Out Of Power, The Indicator Light Blinks Quickly, In That Case, You Need Charge The Controller.

2

**1. Connection Mode:** when the gamepad is charged, the indicator light that shows the current mode will blink slowly; when it's fully charged, the indicator light will keep lighted. 5 minutes later, no action or operation, the indicator light turns off and the controller gets into the sleep mode.

**Example:** When the gamepad connects computer under Xinput mode (the First indicator light keeps lighted), when the controller is charged, the First indicator light will blink slowly; when it's fully charged, the First indicator light will keep lighted, 5 minutes later, no action or operation, the indicator light goes off and the controller goes into the sleep mode.

**2. Disconnected Mode:** when the gamepad is charging, the four indicator lights will blink slowly; when it's fully charged, the four indicator lights will blink quickly. 1 minute later, the indicator light stays off, the controller goes into the sleep.

**Info:** The charging time is 2 to 3 hours for life-time of 12 hours of non-stop play!

SLEEPING MODE

**1. Disconnected Mode:** The Four Indicator Lights Will Blink Quickly, 1 Minute Later, The Indicator Lights Stay Off, And The Controller Goes Into The Sleep Mode.

**2. Connected Mode:** The Indicator Light Will Keep Light, No Action Operation, 5 Minutes Later, The Indicator Lights Stay Off, The Controller Goes Into Sleep Mode

**Info:** You Can Press Home Button To Wake Up The Controller.

INSTALLATION & USE

HOW TO SWITCH THE MODE TO DINPUT OR XINPUT MODE?

When Your Controller Is Connected To Your Pc With Xinput Mode, The First LED Light Will Lit Up. You Can Switch Dinput Mode By Pressing [home] Button On Your Controller For 5 Seconds: The First LED And Second LED Light Will Lit Up Under Analog Mode; Pressing [home] Button For A While, The First LED Will Lit Up Under Digital Mode. To Return Xinput Mode, Press Again The [home] Button On Your Controller For 5 Seconds.

HOW TO CONNECT CONTROLLER TO YOUR PC?

Required Configuration:  
Operating System: Windows® XP to Windows 10  
Insert the receiver on PC and press Home button start controller

HOW TO CONNECT CONTROLLER TO YOUR PS3?

1. Plug the USB receiver to your Playstation 3
2. Turn on your controller by press Home button start
3. The 4 LED indicators flash
4. Your controller is connected to your PS3 when the First LED remains on

3

HOW TO CONNECT CONTROLLER TO ANDROID SYSTEM?

Some devices work with the Android operating system such as Smart Phone, Tablet, Smart TV, TV Box... So you can connect your **Ant Esports GP300 PRO V2** controller:

1. Plug the USB receiver to your Android device  
Warning: Smart Phone/Android Tablet must support OTG function and be equipped with an OTG converter.  
When your controller is used for Smart Phone/Android Tablet, pls plug the OTG Converter into the Phone/Tablet, and then plug Nano USB Receiver into the OTG Convert (Micro USB Head)..
2. Turn on your controller press Home button to start
3. The 4 LED indicators flash
4. Your controller is connected to your Android Device when the First LED remains on

TROUBLE SHOOTING

Why the gamepad does not work with my game?

1. Your game does not support gamepad
2. Configure/activate your gamepad directly in the game interface

No vibration! Why?

1. Your game does not support vibration
2. The vibration function is not activated in the settings of your game

My controller is not working!

1. Charge your controller

IN THE BOX

- 1x Gamepad
- 1x USB Dongle
- 1x OTG Connector
- 1x Charging Cable
- 1x User Manual

G A M I N G U N L I M I T E D

4